



Your stove is supplied with a Spigot and/or Hot plate which has been re-designed for easier fitting. The installation may vary slightly from the information contained in the Stove User and Installation Guide. Please use the guide below. It is advisable to remove the door to enable the components to be fitted.

Important Note: Do not fit components while the stove is hot or in use. Ensure safe working practices are observed (refer to the Stove installation Guide). If stove is installed with a top flue, ensure Hot plate is fitted behind rear heat shield.

Hot plate supplied with self adhesive rope,
3 x nuts + 3 x washers

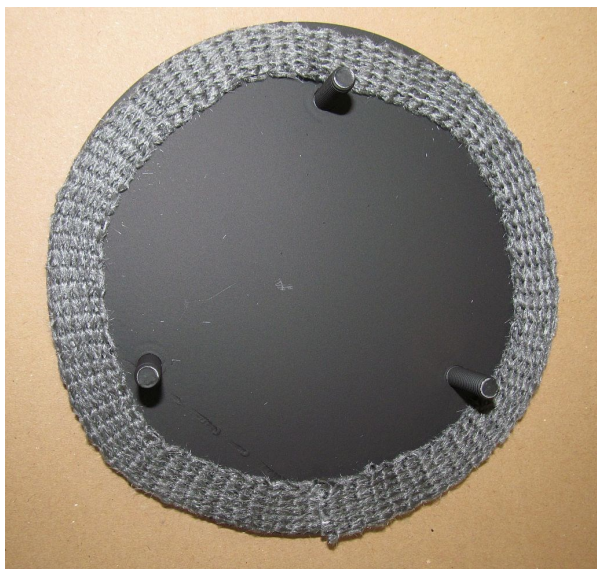

Spigot supplied with self adhesive rope,
3 x screws (if not studded), 3 x nuts + 3 x washers

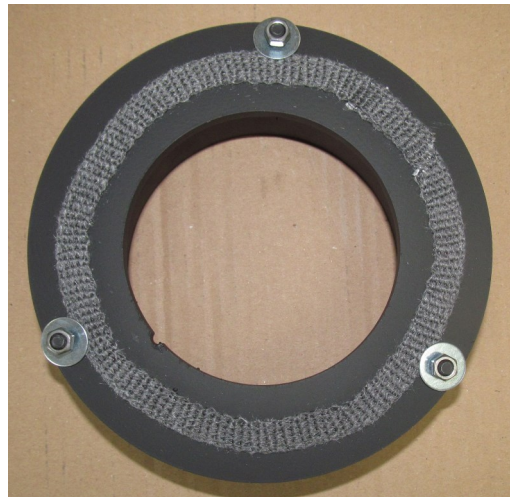

Method:

- Apply self adhesive rope to component as shown.
- Apply fire cement around flue opening.
- Fit hot plate studs through locating holes & secure with washers + nuts on inside of stove OR
- Locate spigot, fit studs or screws through locating holes & secure with washers + nuts on inside of stove.